HIRSCHMANN
Test & Measurement

Plugs

LAS S G

CE

Product	LAS S G
description	Safety straight connector with screw connection for leads from 0.5mm² to 1.5mm², outer diameter of lead max. 4.2mm. Plug 4mm with caged spring, 1000 V-system, IEC 61010. Simple assembly by Click-System.
operating instruction	BA459
article-no. / *colour	9340971xx 00 black · 01 red · 02 blue · 03 yellow · 04 green · 05 brown · 06 gray · 07 white · 09 violet
drawing	
	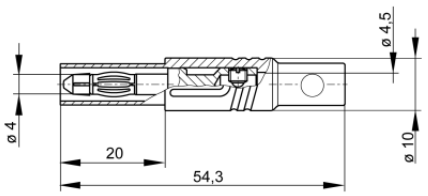
technical data	
connection	screw terminal
rated voltage	AC/DC 1000 V
measurement cat. acc. to IEC 61010	CAT III
rated current (consider derating curve)	24 A
material plug	brass, nickel plated
housing material	PA
temperature range acc. To IEC61010(1)	-15 °C to +70 °C
inflammability class acc. to UL 94 (only valid for basic material of housing)	V-2

(1)contact the manufacturer for applications at deviating temperature ranges
stand : November 13, 2025 6:00 PM

4 mm safety system